

B-RAD SELECT BATTERY SERIES

70 - 4.000 Nm



User manual for:

- B-RAD 275
- B-RAD 475
- B-RAD 700
- B-RAD 700-2
- B-RAD 950-2
- B-RAD 1400
- B-RAD 1400-2
- B-RAD 2000
- B-RAD 2000-2
- B-RAD 4000
- B-RAD 4000-2

USER MANUAL



Table of contents

1. General instructions	3
2. Assembly	3
3. Setting torque	4
3.1 Setting direction of rotation	4
3.2 Operating the torque wrench	4
3.3 Torque select mode	4
3.4 Locked mode	5
3.5 Unit select menu	5
4. Battery	6
4.1 Battery pack faults	6
5. Battery charger	7
5.1 Removing and inserting the battery pack	7
6. Movement of the reaction arm	7
6.1 Installing the reaction arm	7
6.2 Reaction arm height	7
6.3 Reaction arm foot	8
6.4 Reaction point	8
7. Safety	9
8. Warranty	9
8.1 New tool warranty	9
8.2 Repaired tool warranty	9
9. Contact	9

Figure 1



1. General instructions



NOTE: Do not operate the tool before reading these instructions. If breakdown, malfunction or damage occurs, do not attempt to repair, please contact RAD Torque Systems B.V. immediately.

RAD battery torque wrenches are reversible, non-impacting, torque controlled tightening tools and must always be operated with the following:

- Fully charged battery
- Impact sockets with locking pin and o-ring
- Proper reaction arm with retaining ring.



NOTE: These torque wrenches contain metal components that can be dangerous in hazardous areas.

2. Assembly

1. Make sure the battery is fully charged
2. Slide in the battery pack until it engages
3. Fasten and secure the reaction arm on the jagged side of the gearbox with the retaining ring

Figure 2

B-RAD SELECT torque wrench



3. Setting torque

3.1. Setting direction of rotation

Only operate the rotational direction switch and transportation switch when the motor is at standstill, see Figure 3.

Right setting	=	Tightening
Left setting	=	Loosening
Central setting	=	Transportation position

Figure 3



NOTE: In case a higher accuracy, more precise torque settings and presets are required, we advise to select one of the Digital Battery Serie models.

When the tool is in operation the reaction arm rotates in the opposite direction to the output square drive and must be allowed to rest squarely against a solid object or surface adjacent to the bolt to be tightened.

3.2. Operating the torque wrench

1. Use only suitable and proper impact sockets.
2. The handle can be rotated.
3. Make sure that there is no movement between the tool and the reaction arm.
4. The reaction arm placed against a solid reaction point before the trigger is pulled.
This prevents movement of reaction arm.
5. The trigger should be pressed until the torque wrench stops automatically.

3.3. Torque select mode

The default view mode when power is applied is torque select mode. This is the normal running mode in which the operator sets torque and operates the tool.

1. The torque value can be changed by pressing the Up (⬆) button or the Down (⬇) button to increase or decrease the value by 10 units, see Figure 4.
2. To increase or decrease the torque value by 100 units, press and hold the Up (⬆) button or the Down (⬇) button until a value of a multiple of 100 is reached, then the torque value will change by 100 units for as long as a button is held down.
3. The torque value will be saved after 5 seconds. The battery can be removed, and the saved torque value will remain as it was saved.

Figure 4



3.4.Locked mode

Locked mode prevents the operator from changing torque values, calibration values, or units.

1. To enter locked mode, start the tool in torque select mode. The display must show the desired torque value at the time of entering the code, and the operator must wait 5 seconds for the torque value to save.
2. The following combination code must be entered using the keypad: Down, Down, Up, Down, Up, Up, Down, Down, Down.
3. While the indicator LED is flashing, press and hold both the Up and Down buttons until the display scrolls the word "Locked."
4. Two LED indicators at the bottom left of the display will light when the tool is in locked mode.
5. The torque value cannot be changed in locked mode. To set a new torque value to be locked in the tool, the above combination code must be entered again to unlock the tool and the process in steps 3.4.1 – 3.4.2 repeated.
6. The operator cannot access the unit select menu or calibration mode while in locked mode.

3.5.Unit select menu

The unit select menu is used to change the tool's operation units. The possible units are Foot-pounds (FtLb) and Newton-metres (Nm). The unit selections are abbreviated in the menu as "F" (FtLbs) and "n" (Nm).

1. To enter the unit select menu, press and hold both the Up (↑) button and the Down (↓) button until the display flashes a pattern. Release both buttons.
2. If the B-RAD has been calibrated in Foot-pounds, the display will show "u- F." If the B-RAD has been calibrated in Newton-metres, the display will show "u- n."
3. The units can be toggled at any point using the Up or Down button. The torque value previously displayed and saved in torque select mode will be converted to the new units. The entire range of the tool can be used in either Foot-pounds or Newton-metres.
4. To exit unit select, press and hold both the Up button and the Down button until the display flashes a pattern again. Release the buttons to return to torque select mode.



WARNING: Keep your hand and body parts clear of the reaction arm and barrel when the tool is in operation.

4. Battery

- Warning!** Before initial use, check that the voltage and frequency stated on the charger's rating plate match the figures for your own electrical supply.
- Warning!** Unplug charger immediately if the cable or charger is damaged. Unplug immediately if any sign of smoke or flames.
- Warning!** To reduce risk of injury, charge only rechargeable RAD batteries, other types of batteries may burst causing personal injury and damage.
- Warning!** Do not submit the casing to impact or drill into the casing. Do not throw battery packs or charger in fire or immerse in water. Keep battery packs dry. Do not use any damaged or deformed battery packs.
- Warning!** RAD chargers should only be operated between 0-49 degrees Celsius. Keep away from moisture.
- Warning!** Slightly acidic, flammable fluid may leak from defective Li-ion battery packs. If battery fluid leaks out and comes into contact with your skin, rinse immediately with plenty of water. If battery fluid leaks and comes into contact with your eyes, wash them with clean water and seek medical treatment immediately.

Lithium-ion battery chargers are to be used exclusively for charging RAD 18V Lithium-ion battery packs with the maximum capacity of 5.2AH.




Note: To prevent the battery from draining, always remove battery from tool before storage.

4.1. Battery pack faults

Warning indicator stays on

The battery pack is not being charged. The temperature is too high or too low. If the temperature of the battery pack is between 0–49 degrees Celsius, the charging process begins automatically.

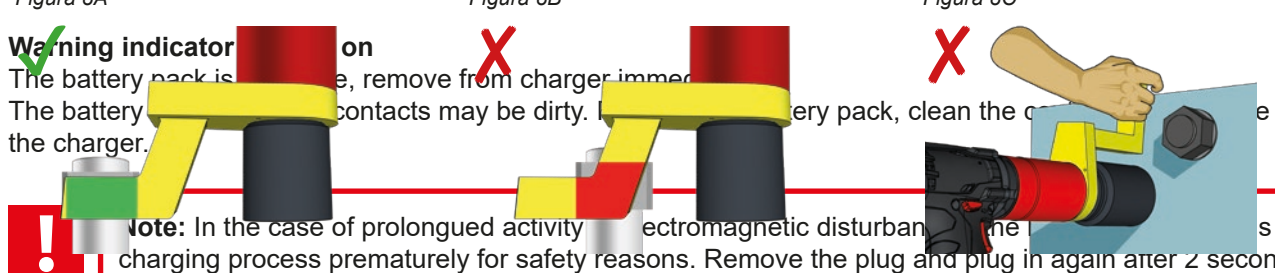

Warning beep

In the case of overheating, the battery will give a loud beep tone. The Lithium-ion battery should be disconnected immediately to cool down. The Lithium-ion battery can be used again once it is cooled down.

5. Battery charger

Before initial use, check that the voltage and frequency stated on the rating plate match your own electrical supply and check that the ventilation slits are clear. Minimum clearance from other objects is 5 centimeters.

1. Connect to electrical supply, the red and green indicator lights up for approximately 1 second.
2. Once the self test is completed, the indicator lights are off.
3. Insert the battery pack into the charging shaft socket; push it to the back until it engages.
4. Charge the battery pack before use. Only once it has been charged and discharged five charging cycles does the battery pack reach its full charging capacity. You may store charged Lithium-ion battery packs and recharge them after an interval of no more than six months.

5.1. Removing and inserting the battery pack


Removal: Press and hold the release button and remove the battery pack.

Inserting: Slide in the battery pack until it engages.

6. Movement of the reaction arm

6.1. Installing the reaction arm

Ensure the reaction arm and retaining ring are installed securely to hold the reaction arm in place. Make sure the reaction arm is in contact with a solid reaction point before you operate the tool. When the tool is in operation the reaction arm rotates in the opposite direction to the output square drive and must be allowed to rest squarely against a solid object or surface adjacent to the bolt to be tightened, see Figure 6.

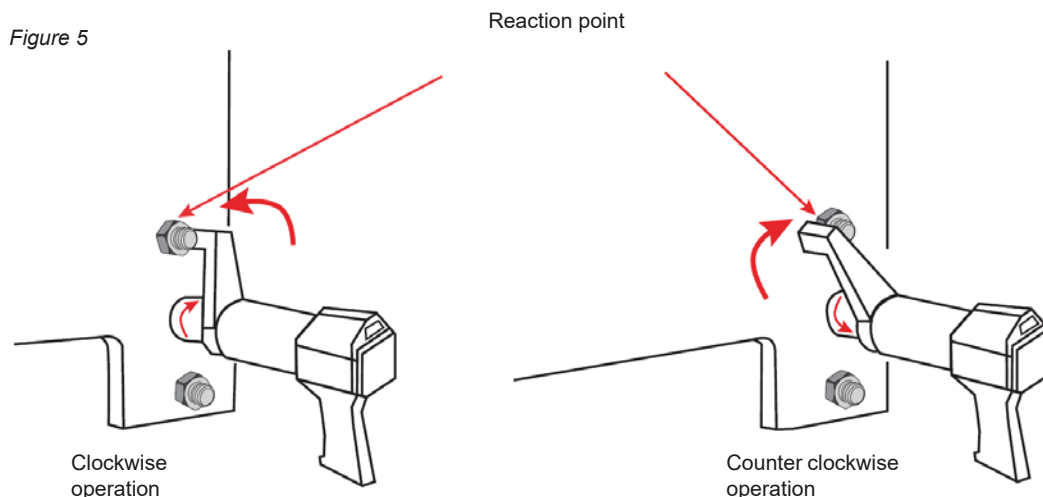

WARNING: While in use, this tool must be supported at all times in order to prevent unexpected release in the event of a fastener or component failure!

6.2. Reaction arm height

Ensure the height of the socket is even with the height of the reaction arm as seen below in Figure 6A. The height of the socket cannot be shorter or higher than the height of the reaction arm as seen below in Figure 6B and Figure 6C.

Figure 6A



Figure 6B

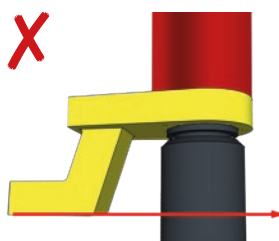


Figure 6C





NOTE: Improper reaction will void warranty and can cause premature tool failure.

6.3.Reaction arm foot

Ensure the foot of the reaction arm aligns with the length of the nut as seen in Figure 7A. The length of the foot cannot be shorter or longer than the nut as seen in Figure 7B and Figure 7C.

Figure 7A

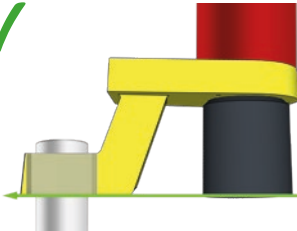


Figure 7B


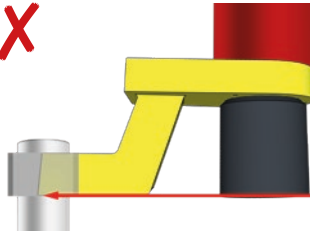


Figure 7C

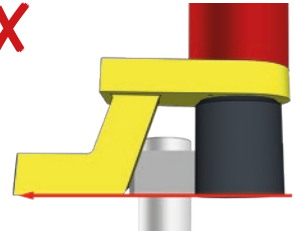

6.4.Reaction point

Ensure the reaction arm reacts off the middle of the foot as seen in Figure 8A. Do not react off the heel of the reaction foot as seen in Figure 8B.

Please contact RAD Torque Systems B.V. or your local RAD authorized distributor for custom reaction arms.



WARNING: Always keep your hand and body parts clear of the reaction arm and barrel when the tool is in operation, see Figure 8C.

Figure 8A

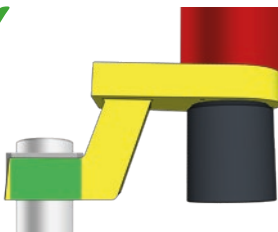


Figure 8B

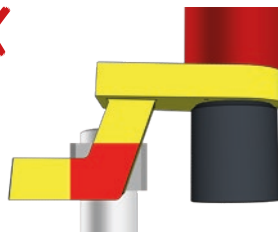


Figure 8C



Note: FOR ADDED SAFETY, WE ADVISE TO ORDER THE OPTIONAL THE DOUBLE SAFETY TRIGGER WITH PART NO: 25949. THIS REDUCES FINGER PINCHING HAZARDS.



7. Safety

RAD tools are developed for tightening and loosening threaded fasteners using very large forces. For your safety and that of others, warning labels and attention labels are prominently attached to the torque wrench and its accessories.



NOTE: Make sure you observe the directions on the warning labels at all times.

RAD tools have been designed with safety in mind however, as with all tools you must observe all general workshop safety practices, and specifically the following:

- Before using your new tool, get familiar with all its accessories and how they work
- Always wear safety goggles when the tool is in operation
- Make sure the reaction arm is in contact with a solid contact point before you operate the tool
- Keep your body parts clear of the reaction arm and the contact point
- Make sure the reaction arm retaining ring is securely in place to hold the reaction arm or blank in place.

RAD tools are safe and reliable. Not following precautions and instructions outlined here can result in injury to you and your fellow workers. RAD Torque Systems B.V. incorporated is not responsible for any such injury.

8. Warranty

8.8. New tool warranty

Any new tool branded with the RAD name and purchased from RAD Torque Systems B.V., or through one of its authorized distributors or agents, is warranted to the original purchaser against defects in materials and workmanship for a period of twelve (12) month from the date of delivery to the end user. This guarantee is valid until fifteen (15) months after the original calibration date.

Furthermore, the warranty conditions determine that no warranty applies if:

1. The defect, wholly or partly, is due to unusual, inappropriate, improper or careless use of the product;
2. The defect, wholly or partly, is due to normal wear and tear or lack of proper maintenance;
3. The defect, wholly or partly, is due to installation, assembly, modification and / or repair by the customer or by third parties;
4. The product is altered, modified, used or processed;
5. The product is transferred to a third party;
6. RAD Torque Systems B.V. has obtained the product, wholly or partly, from a third party, and RAD Torque Systems B.V. can not claim compensation under warranty;
7. RAD Torque Systems B.V. in manufacturing of the product raw materials, and suchlike has used those on the instructions of the customer;
8. The product has a small deviation in it's quality, finishing, size, composition and suchlike, which is not unusual in the industry or if the defect was technically unavoidable;
9. The customer has not fulfilled all obligations under the agreement promptly and correctly towards RAD Torque Systems B.V..

8.9. Repaired tool warranty

After the warranty has expired a three (3) month warranty applies to the original purchaser against defective in material or workmanship or both from the date of repair. To qualify for the above mentioned warranties, written notice to RAD Torque Systems B.V. must be given immediately upon discovery of such defect, at which time RAD Torque Systems B.V.. will issue an authorization to return the tool. Freight costs must be paid in advance. When returning a tool, the reaction arm/s being used with the tool must also be returned.

For the latest warranty terms, please see our sales conditions on our website www.radtorque.eu.

9. Contact

RAD Torque Systems B.V.

Zuidergracht 19
3763 LS Soest

Phone: +31(0) 35-5882450
Website: www.radtorque.eu



MINING

OIL & GAS

WINDPOWER

AEROSPACE

PETROCHEMICAL

MANUFACTURING

COMMERCIAL VEHICLE INDUSTRY

**MASTER DISTRIBUTOR FOR EUROPE, MIDDLE EAST
AND NORTH AFRICA:**

RAD TORQUE SYSTEMS B.V.

ZUIDERGRACHT 19
3763 LS SOEST
THE NETHERLANDS

PHONE.: +31 (0)35 - 5882450

E-MAIL: INFO@RADTORQUE.NL
SALES@RADTORQUE.NL
TECHSUPPORT@RADTORQUE.NL

www.radtorque.eu

