


MIKALOR



ASFA-L[®]

worm-drive hose clips

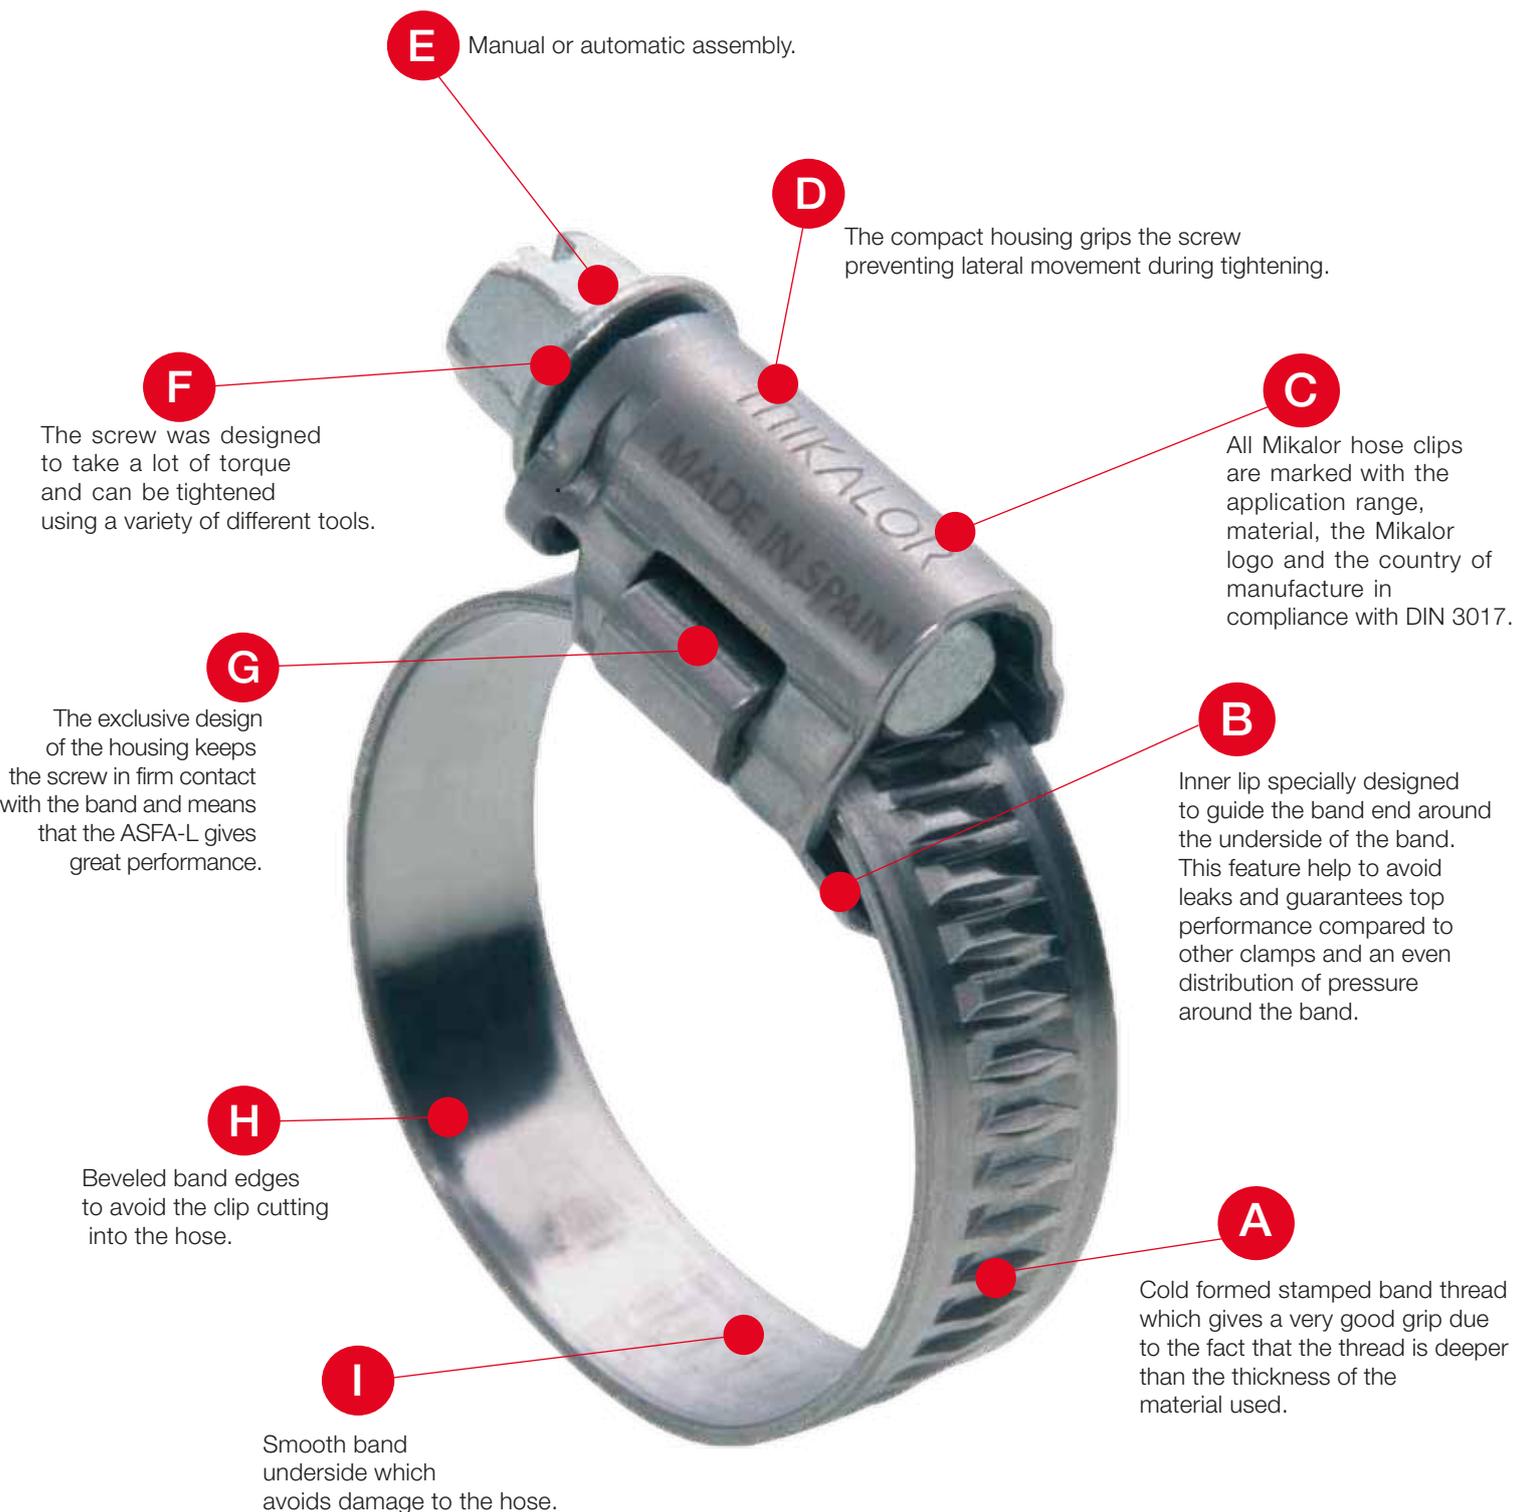


Asfa L worm-drive hose clips


Band 9 mm.

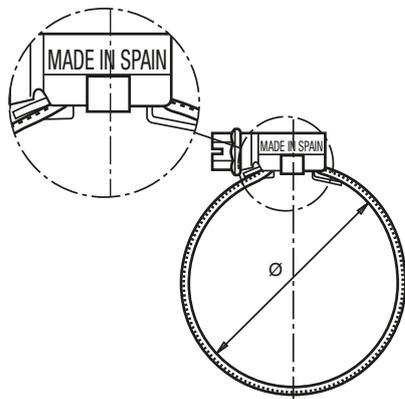


W1 W2



W3 W4 W5



Ø Size		W1	W2	W3	W4	W5
mm	inches					
8-12	5/16-15/32	03008745	03016508		03014000	
8-16	5/16-5/8	03008753	03016516	03016014	03014019	03015759
12-22	1/2-7/8	03008761	03016524	03016022	03014027	03015767
16-27	5/8 - 1 1/16	03008770	03016532	03016030	03014035	03015775
20-32	3/4 - 1 1/4	03008788	03016540	03016049	03014043	03015783
25-40	1 - 1 5/8	03008796	03016559	03016065	03014051	03015804
30-45	1 1/8 - 1 3/4	03008809	03016567	03016073	03014060	03015812
32-50	1 1/4 - 1 7/8	03008817	03016575	03016081	03014078	03015820
40-60	1 5/8 - 2 3/8	03008825	03016583	03016090	03014086	03015839
50-70	1 7/8 - 2 3/4	03008833	03016591	03016102	03014094	03015847
60-80	2 3/8 - 3 1/8	03008841	03016604	03016110	03014107	03015855
70-90	2 3/4 - 3 1/2	03008850	03016612	03016129	03014115	03015863
80-100	3 1/8 - 4	03008868	03016620	03016137	03014123	03015871
90-110	3 1/2 - 4 3/8	03008876	03016639	03016145	03014140	03015880
100-120	4 - 4 1/2	03008884	03016647	03016153	03014158	03015898
110-130	4 3/8 - 5	03008892	03016655	03016161	03014166	03015900
120-140	4 1/2 - 5 1/2	03008905	03016663	03016170	03014174	03015919
130-150	5 - 5 3/4	03008913	03016671	03016188	03014182	03015927
140-160	5 1/2 - 6 1/4	03008921	03016680	03016196	03014190	03015935

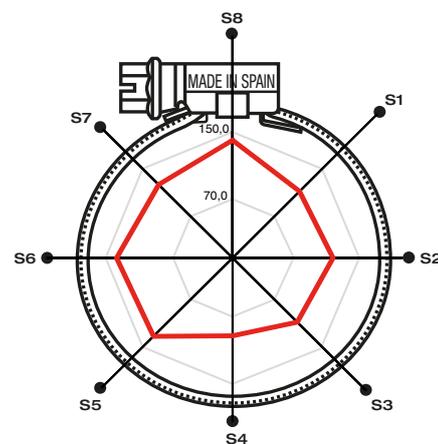

Polar Diagram

● Sectors	S1	S2	S3	S4	S5	S6	S7	S8
— 4 Nm	112,1	118,9	92,8	132,0	137,1	137,1	123,3	140,1

Torque / Efficiency [Nm / daN]

Materials

W1

Screw:
Qst 36-3 Mild steel
(DIN 1.0213)
Silver-white Cr3 Zinc-Plated

Band and Housing:
Galvanized steel
S/EN 10292 (DIN 1.0935)

This clip is ideal for general industrial applications.

W2

Screw:
Qst 36-3 Mild steel
(DIN 1.0213)
Silver-white Cr3 Zinc-Plated

Band and Housing:
X6Cr17 Stainless steel
(DIN 1.4016) (AISI-430)

This clip is very popular in the hardware and domestic markets and in automotive applications.

W3

Screw:
AISI 430 Stainless steel

Band and housing:
Stainless steel
X6Cr17 (DIN 1.4016)
(AISI-430)

ASFA LW3 is specially recommended for use in the automotive industry.

W4

Screw:
AISI-304 Cu (A2)
Stainless steel

Band and Housing:
X5CrNi1810
Stainless steel
(DIN 1.4301) (AISI-304) (A2)

This clip is ideally for use in the marine industry, due to the corrosion resistance offered by the use of AISI-304 stainless steel in its manufacture.

W5

Screw:
AISI-316 Cu Stainless steel (A4)

Band and Housing:
X5CrNiMo 17.12.2
Stainless steel (DIN 1.4401)
(AISI-316) (A4)

This clip is ideally for use in the petrochemical, foodstuffs and marine industry due to the outstanding corrosion resistance offered by the use of AISI-316 stainless steel in its manufacture

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Patented Worldwide.



MIKALOR